

Air &
Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical
Transfer

Cleaning
Equipment



FOOD WASHDOWN

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction &
Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional
Products
Chemical Charts
General
Information
Minimum Run
Requirements

	Page	Non-Marking	Superior Oil Resistance Tube and Cover	Superior Abrasion Cover	Anti Microbial Cover	Tapered Nozzle	Wire	Textile
Fortress™ 300	73	Yes	Yes	Yes	Yes			Yes
Fortress™ 1000	74	Yes	Yes	Yes	Yes			Yes
Fortress™ 3000	75	Yes	Yes	Yes	Yes		Yes	
Gauntlet® 1500	52	Yes*	Yes	Yes				Yes
Plicord® Washdown	212					Yes		Yes
Sani-Wash™ 300	79	Yes						Yes
Spectra™ 300	76	Yes	Yes					Yes
Spectra™ 1000	77	Yes	Yes				Yes	
Spectra™ 3000	78	Yes	Yes				Yes	

*Nonblack Colors



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

FOOD WASHDOWN



- APPLICATION:** A high-quality construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse affects of oil and animal fats. The cover of Goodyear's Fortress 300 hose incorporates Microban's®* anti-microbial built-in product protection.
- CONSTRUCTION**
- TUBE:** Black Nitrile synthetic rubber
- COVER:** Yellow Carbryn® synthetic rubber, RMA Class A (High Oil Resistance) with Microban® product protection
- REINFORCEMENT:** Spiral synthetic yarn
- TEMPERATURE:** -20°F to 200°F (-29°C to 93°C)
- PACKAGING:** 1/2"-3/4" 500' reels, maximum 3 pieces, 50' increments
1" 450' reels, maximum 3 pieces, 50' increments
- BRANDING:** Continuous brand example "Fortress 300 with Microban® Built-in Protection 3/8" 300 psi WP. Made in USA by Goodyear™."
- COUPLINGS:** Use Goodyear's pressure washer fittings with this product. See page 235 for available sizes. Refer to Goodyear's Hose Assembly Manual for crimp procedures. Coupled lengths with MxMS fittings and Kink Guards available.
- NON-STOCK/SIZES:** Contact customer service for availability on cut, coiled, and tied hose lengths.
- ORDER CODES:** 569-120

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/2	12.7	0.90	22.8	300	2.07	0.29	0.43
5/8	15.9	1.06	27.0	300	2.07	0.36	0.54
3/4	19.1	1.19	30.2	300	2.07	0.41	0.61
1	25.4	1.50	38.1	300	2.07	0.60	0.89

*Microban® antimicrobial product protection inhibits the growth of bacteria, mold, and fungi that can cause odor, stains, or degradation of the hose cover.

Microban® is intended to protect the hose cover only. It is not a substitute for good sanitary practices.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements

Air &
Multipurpose
General Purpose
Heavy Duty
Push-on

FOOD WASHDOWN



Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

APPLICATION:

For use on pressure washer machines with working pressures up to 1000 psi. Applications include washdown service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse affects of oil and animal fats. The cover of Goodyear's Fortress™ Washdown hose incorporates Microban's®* antimicrobial built-in product protection.

Marine

CONSTRUCTION

TUBE:

Nitrile synthetic rubber

COVER:

Carbryn® synthetic rubber, RMA Class A (High Oil Resistance) with Microban® product protection.

REINFORCEMENT:

Braided (1) synthetic yarn

TEMPERATURE:

-20°F to 200°F (-29°C to 93°C)

PACKAGING:

500' reels, maximum 3 pieces, 50' increments: coupled lengths available

BRANDING:

Continuous brand example "Fortress™ 1000 with Microban® Built-in Protection 3/8" 1000 psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

536-575 (yellow) 536-583 (red) 536-481 (blue)

Material Handling

Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction &
Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional
Products
Chemical Charts
General
Information
Minimum Run
Requirements

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.59	15.0	1000	6.9	0.12	0.18
3/8	9.5	0.75	19.1	1000	6.9	0.18	0.27
1/2	12.7	0.86	21.8	1000	6.9	0.20	0.30
3/4	19.1	1.20	30.5	1000	6.9	0.42	0.63

*Microban antimicrobial product protection inhibits the growth of bacteria, mold, and fungi that can cause odor, stains, or degradation of the hose cover.

Microban is intended to protect the hose cover only. It is not a substitute for good sanitary practices.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

FOOD WASHDOWN



APPLICATION:

Goodyear's Fortress™ 3000 is for use on pressure washer machines with working pressures up to 3000 psi. Applications include washdown service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of Goodyear's Fortress™ Washdown hose incorporates Microban's®* antimicrobial built-in product protection.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber

COVER:

Carbryn® synthetic rubber, RMA Class A (High Oil Resistance) with Microban® built-in product protection.

REINFORCEMENT:

Braided (1) steel wire

TEMPERATURE:

-20°F to 250°F (-29°C to 121°C)

PACKAGING:

500' reel, maximum 3 pieces, 50' increments: coupled lengths available

BRANDING:

Continuous brand example "Fortress™ 3000 with Microban® Built-in Protection 3/8" 3000 psi WP. Made in USA by Goodyear™."

COUPLINGS:

Use Goodyear's pressure washer fittings with this product. See page 235 for available sizes. Refer to Goodyear's Hose Assembly Manual for crimp procedures. Coupled lengths with MxMS fittings and Kink Guards available.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

539-400 (Yellow) 539-401 (Blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.53	13.5	3000	20.69	0.15	0.22
3/8	9.5	0.69	17.5	3000	20.69	0.24	0.36
1/2	12.7	0.82	20.8	3000	20.69	0.32	0.48

*Microban antimicrobial product protection inhibits the growth of bacteria, mold, and fungi that can cause odor, stains, or degradation of the hose cover.

Microban is intended to protect the hose cover only. It is not a substitute for good sanitary practices.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements

Air &
Multipurpose
General Purpose
Heavy Duty
Push-on

FOOD WASHDOWN

SPECTRA™ 300



Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction &
Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional
Products
Chemical Charts
General
Information
Minimum Run
Requirements

APPLICATION:

A high quality, economical construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries.

CONSTRUCTION

TUBE:

Black Nitrile synthetic rubber, RMA Class A (High Oil Resistance), non-FDA

COVER:

White Chemivic® synthetic rubber, RMA Class A (High Oil Resistance)

REINFORCEMENT:

Spiral synthetic yarn

TEMPERATURE:

-20°F to 200°F (-29°C to 93°C)

PACKAGING:

1/2"-3/4" 500' reels, maximum 3 pieces, 50' increments
1" 450' reels, maximum 3 pieces, 50' increments

BRANDING:

Continuous brand example "Spectra (19.1 mm) 300 psi WP. Made in USA by Goodyear™."

COUPLINGS:

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

569-019

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/2	12.7	0.91	23.1	300	2.07	0.27	0.40
3/4	19.1	1.18	30.0	300	2.07	0.40	0.60
1	25.4	1.50	38.1	300	2.07	0.60	0.89



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

FOOD WASHDOWN

SPECTRA™ 1000



- APPLICATION:** For use on pressure washer machines with working pressures up to 1000 psi. Its oil-resistant cover provides protection against the effects of oil and animal fats.
- CONSTRUCTION**
- TUBE:** Nitrile synthetic rubber
 - COVER:** Yellow oil-resistant synthetic rubber, RMA Class A (High Oil Resistance)
 - REINFORCEMENT:** Braided (1) steel wire
- TEMPERATURE:** -20°F to 250°F (-29°C to 121°C)
- PACKAGING:** 500' reel, maximum 3 pieces, 50' increments, coupled lengths available
- BRANDING:** Continuous brand example "Spectra™ 1000 3/8" 1000 psi WP. Made in USA by Goodyear™."
- COUPLINGS:** Contact fitting manufacturer for proper fitting recommendation and coupling procedure.
- NON-STOCK/SIZES:** Refer to page 300 for special production run minimum requirements.
- ORDER CODES:** 539-404

ID		NOM. OD		MAX. WP		WEIGHT	
<i>in.</i>	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>psi.</i>	<i>Mpa.</i>	<i>lb./ft.</i>	<i>kg./m.</i>
3/8	9.5	0.69	17.5	1000	6.90	0.23	0.34
1/2	12.7	0.81	20.6	1000	6.90	0.29	0.42
3/4	19.1	1.10	27.9	1000	6.90	0.42	0.63

Note: Not recommended for steam service.

Air &
Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction &
Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional
Products
Chemical Charts
General
Information
Minimum Run
Requirements




See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

Air &
Multipurpose
General Purpose
Heavy Duty
Push-on

FOOD WASHDOWN

SPECTRA™ 3000

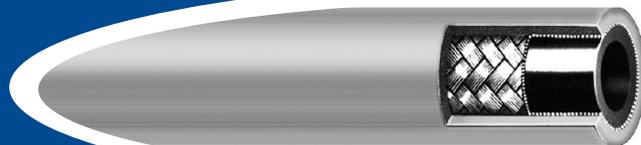

Chemical
Transfer

Cleaning
Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction &
Discharge
Washdown

Welding

Coupling
Systems

Appendix
Additional
Products
Chemical Charts
General
Information
Minimum Run
Requirements

APPLICATION:

For use on pressure washer machines with working pressures up to 3000 psi. Its oil-resistant cover provides protection against the effects of oil and animal fats.

CONSTRUCTION

TUBE:

Nitrile synthetic rubber

COVER:

Yellow oil-resistant synthetic rubber, RMA Class A (High Oil Resistance)

REINFORCEMENT:

Braided (1) steel wire

TEMPERATURE:

-20°F to 250°F (-29°C to 121°C)

PACKAGING:

500' reels, maximum 3 pieces, 50' increments, coupled lengths available

BRANDING:

Continuous brand example "Spectra™ 3000 3/8" 3000 psi W.P. Made in USA by Goodyear™."

COUPLINGS:

Use Goodyear's pressure washer fittings with this product. See page 235 for available sizes. Refer to Goodyear's Hose Assembly Manual for crimp procedures. Coupled lengths with MxMS fittings and Kink Guards available.

NON-STOCK/SIZES:

Refer to page 300 for special production run minimum requirements.

ORDER CODES:

539-413

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.54	13.7	3000	20.69	0.16	0.24
3/8	9.5	0.69	17.5	3000	20.69	0.24	0.36
1/2	12.7	0.82	20.8	3000	20.69	0.32	0.48

Note: Not recommended for steam service.



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.

© 2006. The Goodyear Tire & Rubber Company.

FOOD WASHDOWN



- APPLICATION:** An economical hose for hot water washdown up to 205°F cleanup in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries.
- CONSTRUCTION**
- TUBE:** Versigard® synthetic rubber
 - COVER:** White Versigard synthetic rubber
 - REINFORCEMENT:** Textile reinforced
- TEMPERATURE:** -40°F to 200°F (-40°C to 93°C)
- PACKAGING:** 1/2"–3/4" 500' reels, maximum 3 pieces, 50' increments
1" 450' reels, maximum 3 pieces, 50' increments
- BRANDING:** Brand example "Goodyear™ Sani-Wash 300 psi WP 3/4" (19.1 mm) Made in USA."
- COUPLINGS:** Contact fitting manufacturer for proper fitting recommendation and coupling procedure.
- NON-STOCK/SIZES:** Refer to page 300 for special production run minimum requirements.
- ORDER CODES:** 569-020

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/2	12.7	0.84	21.3	300	2.07	0.26	0.39
5/8	15.9	1.00	25.4	300	2.07	0.31	0.46
3/4	19.1	1.17	29.7	300	2.07	0.42	0.63
1	25.4	1.47	37.3	300	2.07	0.62	0.92

Air & Multipurpose
General Purpose
Heavy Duty
Push-on

Chemical Transfer

Cleaning Equipment

Food
Transfer
Washdown

Marine

Material Handling
Abrasives
Bulk Transfer
Cement & Concrete

Mining

Petroleum
Aircraft Fueling
Dispensing
Dock
Transfer

Spray

Steam

Vacuum

Water
Discharge
Suction & Discharge
Washdown

Welding

Coupling Systems

Appendix
Additional Products
Chemical Charts
General Information
Minimum Run Requirements



See Page 2 for complete product warranty and terms of sale information. In V-Cat, please reference the Conditions of Sale page in the General Information section. Information in this catalog supersedes all previously printed material. Information valid as of the day published. Due to continual product improvements, Goodyear reserves the right to alter specs without prior notice. For the most current product information, visit us online at www.goodyear-hose.com.